

2. 0mm Female Header, Dual Row, Straight

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ " Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance:20mΩ Max.



绝缘电阻 Insulator Resistance: 1000M Ω Min.

耐电压Withstanding Voltage:AC 500V

额定电流Currrnt Rating:1.5 AMP

适用温度范围 Operating Temperature: -40°C to $+105^{\circ}\text{C}$

耐温性能Temperature resistancet:255℃±5℃, 3s-5s max

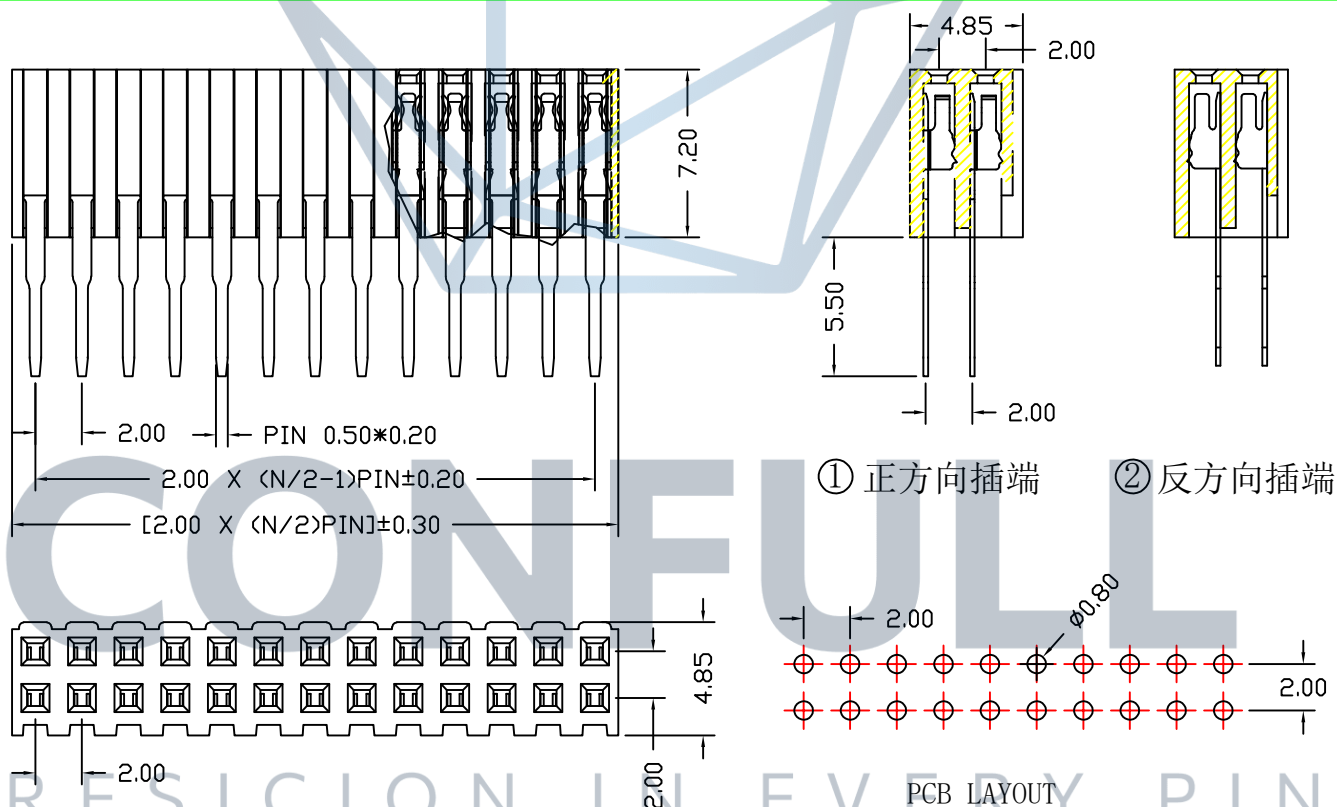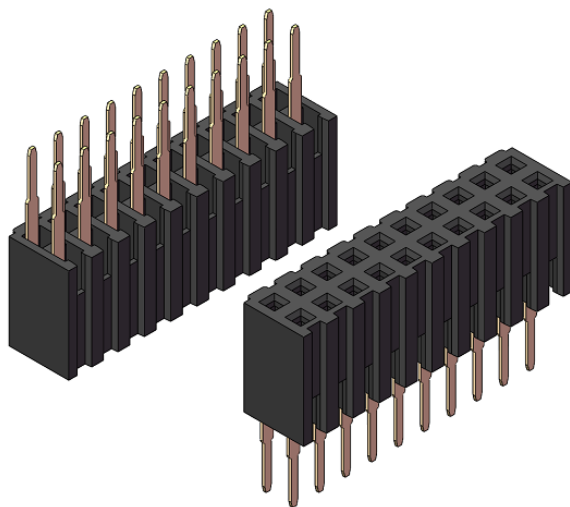

订购方法 How To Order

2.0排母	H	B	XX	S	T/A	G0	XXX
Plastics Height H=7.20mm	Material Type A=PBT B=Nylon-6T C=LCP D=Nylon-46	NO. of Positions Per Row 02~80	S: Straight(180°) R: Right Angle(90°) M: S.M.T	T: TIN(镀锡) A: Aureate (镀金)	Contact Plating SN: Tin G0: Gold Flash G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold S0: Gold Flash/Tin Standard: G0	Pin Lenght 7.20 U型 端子 L12.1 长端	

常规表达：型号（2.0排母座）-胶芯高度（H）-规格（2*XXP）-类型（S）-接触件镀层（XXU"）-尺寸（XXX）

* 其它要求的产品另外说明 Other requests's product on the other hand description