

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PBT Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 205°C ± 5°C, 3s-5s max

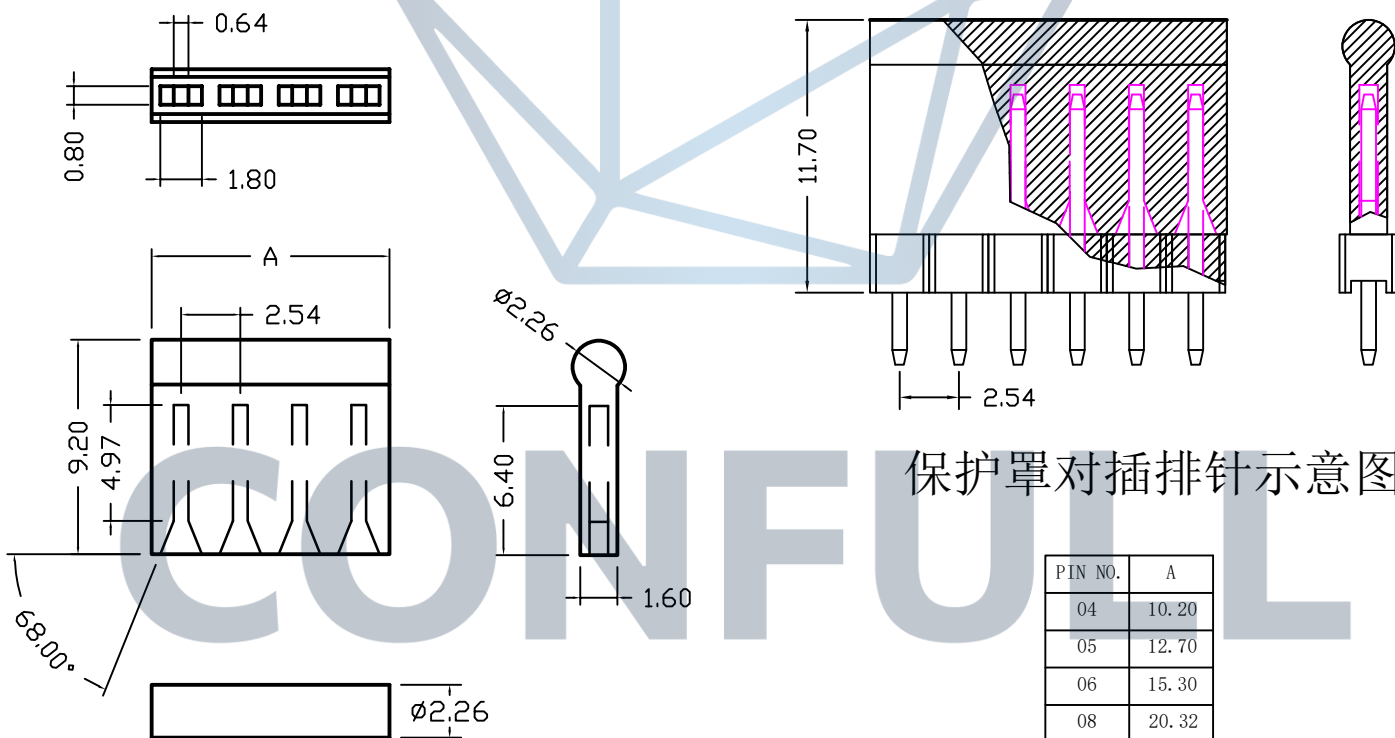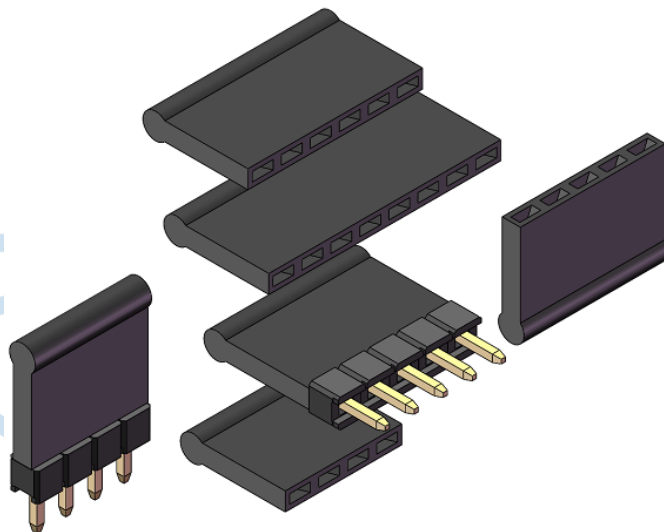

保护罩对插排针示意图

订购方法 How To Order

2.54 排针保护罩

A	1	XX	B
Material Type A=PBT B=Nylon-6T	NO. of Row 1= Single Row	NO. of Positions Per Row 04 Pin 05 Pin 06 Pin 08 Pin	Color Type B=Black

常规表达: 型号 (2.54单排针保护罩) - 材质 (PBT) - 规格 (XXP) - 颜色 (B)

* 其它要求的产品另外说明 Other requests's product on the other hand description