

### SPECIFICATIONS

#### 材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)  
Standard: PA6T Black

接触件Contacts: Brass/Phosphor Bronze

接触电镀Contact Plating: Au or Sn over 30 μ" Ni

#### 电气性能Electrical Characteristics:

接触电阻Contact Resistance: 20mΩ Max.



绝缘电阻Insulator Resistance: 1000MΩ Min.

耐电压Withstanding Voltage: AC 500V

额定电流Current Rating: 3 AMP

适用温度范围Operating Temperature: -40°C to +105°C

耐温性能Temperature resistance: 255°C ± 5°C, 3s-5s max

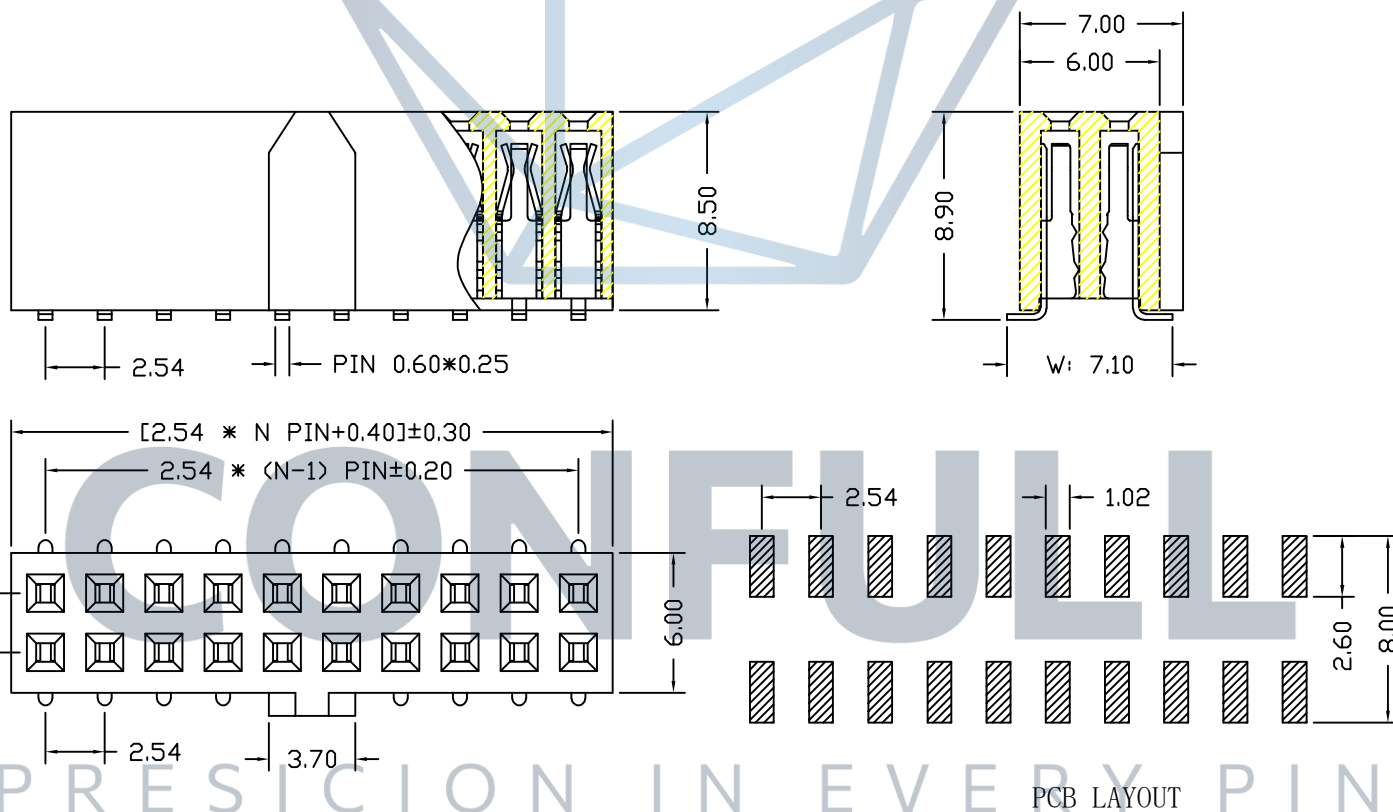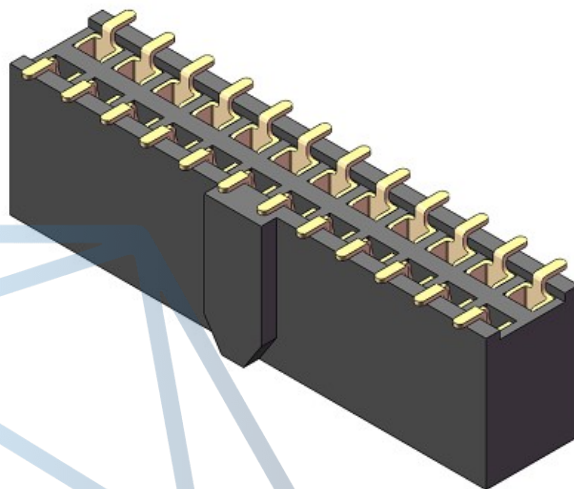

### 订购方法 How To Order

| 2.54排母                                                                                                                     | 85                                                          | B                                      | XX                                                   | M                                | T/A                                                                                                                                                   | G 0                         | XXX |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------|------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----|
| Plastics Height<br>35=3.5mm<br>50=5.0mm<br>57=5.7mm<br>68=6.8mm<br>71=7.1mm<br>80=8.0mm<br>81=8.1mm<br>85=8.5mm<br>11=11mm | Material Type<br>A=PBT<br>B=Nylon-6T<br>C=LCP<br>D=Nylon-46 | NO. of Positions<br>Per Row 02 thru 40 | S: Straight(180°)<br>R: Right Angle(90°)<br>M: S.M.T | T: TIN(镀锡)<br>A: Aureate<br>(镀金) | Contact Plating<br>SN: Tin<br>G0: Gold Flash<br>G2: 5u" Gold<br>G3: 10u" Gold<br>G4: 15u" Gold<br>G5: 30u" Gold<br>S0: Gold Flash/Tin<br>Standard: G0 | Pin Lenght<br>8.5 U型 SMT 端子 |     |

常规表达: 型号 (2.54排母座) - 胶芯高度 (H) - 规格 (2\*XXP) - 类型 (M) - 接触件镀层 (XXU") - 尺寸 (XXX)

\* 其它要求的产品另外说明 Other requests's product on the other hand description